

## A-Lock mechanical



**Quick change of attachments** without hydraulic supply

**For excavators without hydraulic circuits at the boom**

**Simple locking mechanism**

**No parts jut out sideways, improved use with slender buckets <sup>1)</sup>**

**Can be refitted to hydraulic A-Lock Compact Plus <sup>2)</sup>**

**Safeguarding of the locking bolt, optical control**

**Tool for opening is included in accessories <sup>1)</sup>**

1) Concerns CI 3 and 3 Combi, which are made in „Compact“-style  
2) Class 01, 1 and 2 can be modified into A-Lock Safety

**Advantages**

Fits to any type of excavator

Form locking system

Pin to point distance is the same as with OEM bucket

Safeguarding of the locking by spring born flap (3, 3 Combi) respectively fastener for the locking hand gear (Class 1,2 and 2 C)

Open / close with 1 1/2 rotations (540°)


Operating A-Lock mechanical Compact (Kl. 3, 3C)



Release locking bolt by opening the safety flap



Open with 1 1/2 rotations

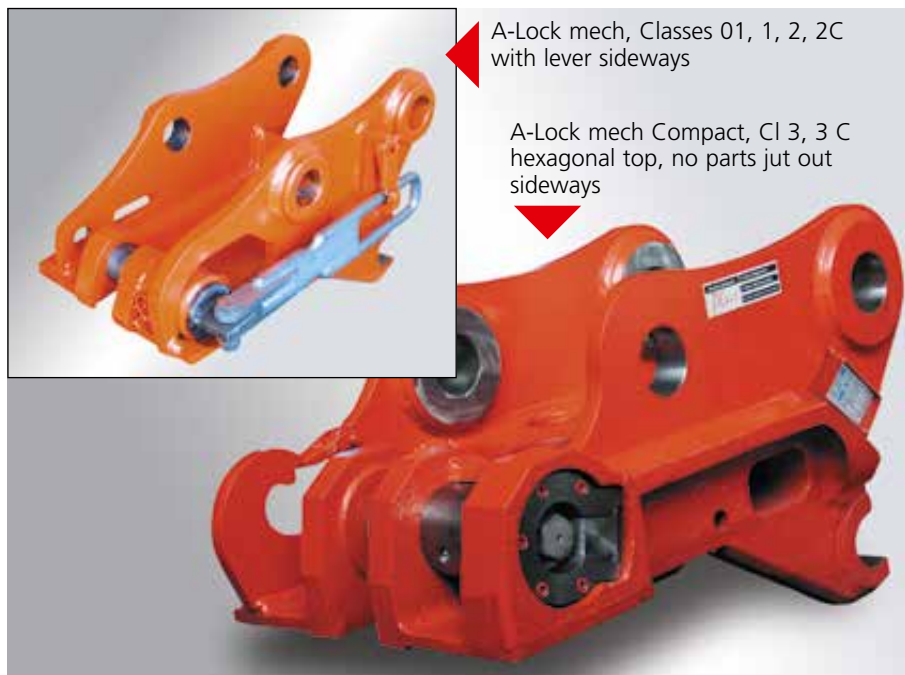

A-Lock mech, Classes 01, 1, 2, 2C with lever sideways

A-Lock mech Compact, Cl 3, 3 C hexagonal top, no parts jut out sideways

**Available in following classes**

Class**	Cl 01	Cl 1	Cl 2	Cl 2 C	Cl 3	Cl 3 C
Carrier weight, to*	< 3,5	3,5 - 6	6 - 10	10 - 12	12 - 24	24 - 38

\* This classification is only a rough recommendation. The right choice of an A-Lock depends on individual parameters.

\*\* Attachments can be used vice versa in the classes 3 / 3Combi, 5 / 5 Combi und 6 / 6 Combi.

**WIMMER Hartstahl GmbH & Co KG** and **WIMMER Felstechnik GmbH**  
 Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel. +43 (0)6235 6655-0, Fax DW-18

**WIMMER International CZ s.r.o.**, Rudolfovská 170 a, 370 01 České Budějovice,  
 Tel. +420 387 203 735, Fax +420 387 203 736

office@wimmer.info

[www.wimmer.info](http://www.wimmer.info)



Authorized WIMMER Dealer: