


Bole- and pipe grapple  
**OCTOPUS**



## Special grapple for pipes and boles

- Integrated holding device keeps the load even when the engine is switched off for about 30 minutes
- Clamps objects with a diameter of more than 110 mm
- Hydraulic 360° endless rotation
- Made with special wear steel
- Special version with saw for the models 2.5, 3.0, 4.0

Model	OCT 1.0	OCT 2.0	OCT 2.3	OCT 2.5	OCT 3.0	OCT 4.0	OCT 6.0
Shell width, mm (A)	640	740	740	790	920	920	1360
Height without adapter, mm (B)	1020	1100	1100	1250	1390	1390	1730
Max. opening, mm (C)	800	1000	1000	1300	1400	1400	1600
Inner height closed, mm (D)	100	100	100	100	100	100	100
Weight without adapter, kg	415	719	820	960	1.415	1.550	2.765
Closing force, to	3	4	4	5	6	6	10
<b>Hydraulic data</b>							
Open/close, max. bar	320	320	320	350	350	350	350
Open/close, l/min	20 - 40	30 - 60	30 - 60	40 - 80	70 - 120	70 - 120	120 - 200
Rotate, max. bar	320	320	200	200	200	200	200
Rotate, l/min	15 - 20	15 - 25	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25
Excavator weight, to	6 - 10	10 - 12	12 - 16	16 - 22	20 - 27	24 - 32	32 - 46

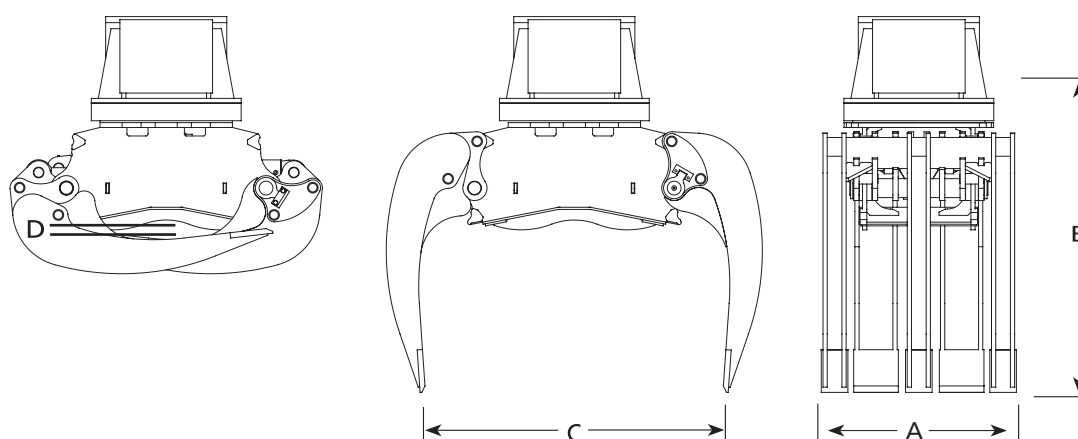

OCT 1.0 - 2.0  
with rotating motor



OCT 2.3 - 6.0  
with rotating device



WIMMER Hartstahl GmbH & Co KG und WIMMER Felstechnik GmbH  
Industriestraße 3 | A-5303 Thalgau, AUSTRIA | Tel. +43 (0)6235 6655-0

office@wimmer.info



wimmer.info