

## Grapple „Mammut“



**Grapple** for demolition, sorting and stone positioning

**Integrated holding device keeps the load even when the engine is switched off for about 30 minutes \***

**Equipped with turnable cutting edge \***

**Rotation circuit supply by A-Lock connectors**

**Body also for use with other shell forms**

**Hydraulic 360° endless rotation**


**Made with special wear resisting steel**

\*not valid for model 0.5



**ATTENTION: the hydraulic values indicated here after are not to be considered for the regulation of the excavator – please use the instructions!**

Model	SG 0.5	SG 1.0	SG 2.0	SG 2.3	SG 2.5	SG 3.0	SG 4.0	SG 5.0	SG 6.0
Shell width, mm (A)	500	600	600	600	700	800	1000	1100	1200
Hight without adapter, mm (B)	810	878	950	950	1100	1185	1185	1440	1480
Max. opening, mm (C)	1150	1340	1800	1800	1930	2100	2100	2250	2400
Inner hight closed, mm (D)	470	559	650	650	660	750	750	860	950
Weight without adapter, kg	270	425	700	820	1.065	1.565	1.740	2.140	2.700
Content, l, (SAE)	120	180	300	300	410	550	680	910	1080
Closing force, to	2,5	3	4	4	5	6	6	9	10
<b>Hydraulic data</b>									
Open/close, max. pressure, bar	250	320	320	320	350	350	350	350	350
Open/close, oil flow, l/min	15 - 35	20 - 40	30 - 60	30 - 60	40 - 80	70 - 120	70 - 120	90 - 150	120-200
Rotate, max. pressure, bar	250	320	320	200	200	200	200	200	200
Rotate, oil flow, l/min	15 - 20	15 - 20	15 - 20	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25	20 - 25
Excavator weight, to	4 - 8	6 - 10	10 - 12	12 - 16	16 - 22	20 - 27	24 - 28	28 - 38	38 - 46

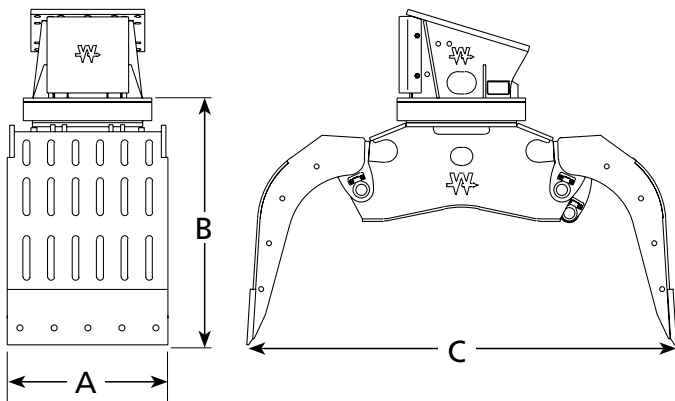

SG 0.5 bis 2.0 with rotating motor



SG 2.3 bis 6.0 with rotating device



WIMMER Hartstahl GmbH & Co KG and WIMMER Felstechnik GmbH  
 Industriestraße 3, A-5303 Thalgau, AUSTRIA, Tel. +43 (0)6235 6655-0

office@wimmer.info