


Attachment drilling unit Ultra-light-carriage AB L100



Remote dimensions
220 x 140 x 150 mm (L/W/D)



Remote control
model T3

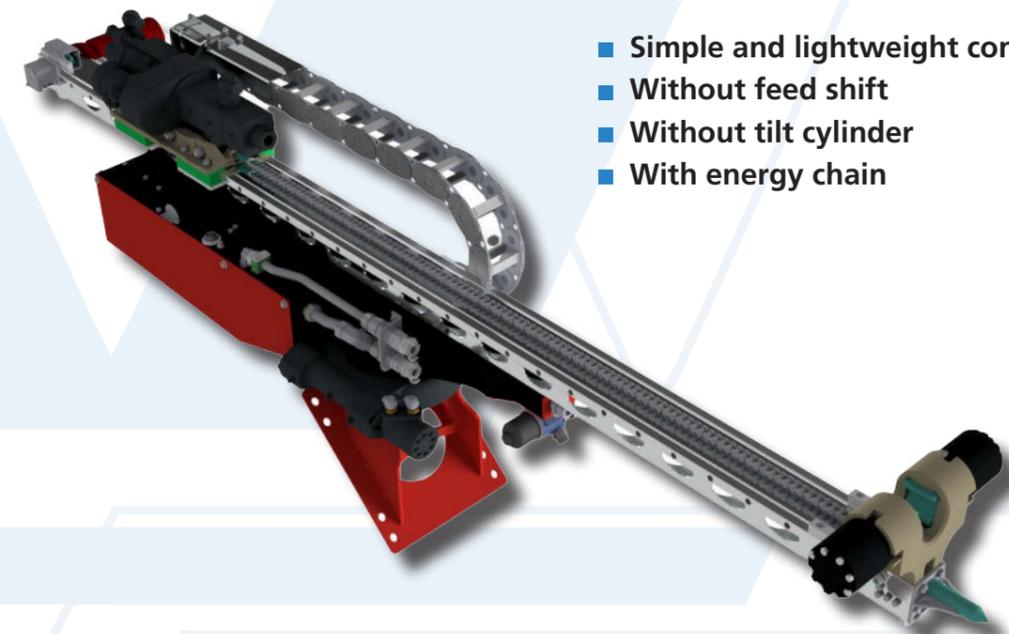

- Simple and lightweight construction
- Without feed shift
- Without tilt cylinder
- With energy chain

Drill hammer
MA100

Max. 1.000 Nm



Features / Shank adapter

Drill hammer configuration:
Inner thread, air flushing, pneumatic percussion, hydraulic rotation


Possible shank adapters:
R25, R32, R38, R51 TITAN 30/40/52

Motor variants / Torque:
500 Nm, 1.000 Nm

Application:
Drill & blast with extending,
anchor drilling, drill & split



Possible accessories as Option:
Extern **Oiler**

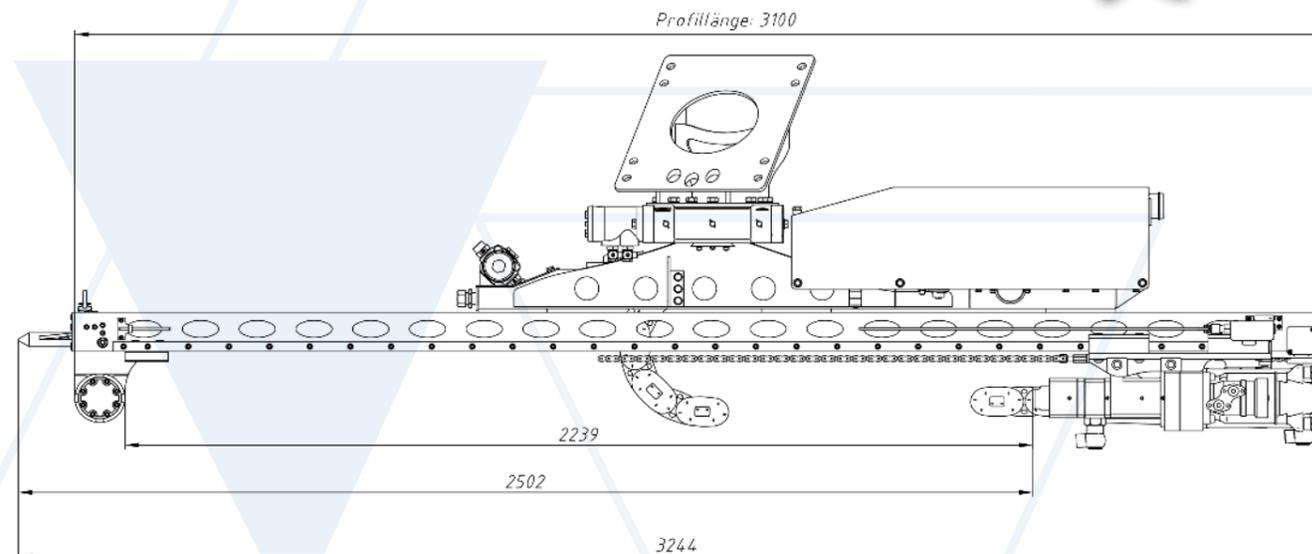

■ Attachment for crawler and mobile excavators from 4 to.

[weblink
click here](#)

■ Compact & robust design

■ Stable, ultra-light high-performance profile

■ Simple carriage for anchor and blast hole drilling

Technical details (Subject to change)

ATTENTION: the hydraulic values indicated here after are not to be considered for the regulation of the excavator – please use the instructions!

Model	AB L100 10-PH
Drill hammer	MA100
Torque max., Nm	500 / 1.000
Carriage type	CF100
Carriage tilting	-
Carriage rotation	360° not endless
Standard clamp, single	CF100
Integrated alternator	✓
Remote controlled	✓
Blank firing protection	✓
Anti-jam. automation, hollow protection	✓
Application / Shank adapter	
Drill and blast	R25, R32, T38
Anchor drilling	R32, R38, R51 Titan 30/40/52
Possible features / Options	
Climbversion	-
Angle indication	✓
PLC-Automatic with depth measurement	✓
Wimmer Cockpit	✓
Possible clamp	CF100 (Ø 75 mm)
Clamp-/ breaking device	-
Suction foot	✓
Requirements for the carrier device	
Carrier weight, to.	> 4
Required engine performance, kW	24
Oil supply (L / min)	55 @ 180 bar
Air supply (L / min) - percussion	4.500 @ 6 bar
Pressure max. relief valve (bar)	220
Dimensions and weight	
Weight, kg.	400
Length, mm	3.244
Drill rod length, 1. rod mm	2.435
Drill rod length, 2. rod mm	2.000